

RECOMMENDED CUTTING CONDITIONS

■ Cutting Speed

Workpiece Material			Greade	Breaker	Cutting Speed vc (m/min)
P	Mild Steel (ASTM A36,AISI 1010)	≤180HB	MP6120	GM	200 (150—220)
	Carbon Steel, Alloy Steel (AISI 1045,AISI 4140)	180—280HB	MP6120	GM	200 (150—220)
N	Aluminium Alloy (A6061, A7075 etc)	Si<5%	TF15 LC15TF	GL	1000 (200—3000)
			TF15 MP9120	GM	1000 (200—3000)
	Aluminium Alloy (AC4B, ADC12, A390 etc)	5%≤Si≤10% Si>10%	MP9120	GM	1000 (200—3000)
S	Titanium Alloy (Ti-6Al-4V etc)	—	MP9120	GM	40 (30—60)

■ Depth of Cut / Feed per Tooth

Workpiece Material		Breaker	Cutting Width ae (mm)	Depth of Cut ap (mm)	Feed per Tooth (mm/t)					
					Cutting Edge Diameter DC (mm)					
					20	25, 28	32, 35	40	50, 63, 80	100, 125
P	Mild Steel (ASTM A36,AISI 1010)	≤180HB	GM	≤0.25 DC	≤ 5	≤ 0.05	≤ 0.15	≤ 0.15	≤ 0.18	≤ 0.18
					≤ 10	≤ 0.05	≤ 0.12	≤ 0.12	≤ 0.15	≤ 0.15
					≤ 14.5	≤ 0.05	≤ 0.10	≤ 0.10	≤ 0.12	—
				≤0.5 DC	≤ 5	≤ 0.05	≤ 0.12	≤ 0.15	≤ 0.15	≤ 0.18
					≤ 10	—	≤ 0.10	≤ 0.12	≤ 0.12	≤ 0.15
					≤ 14.5	—	≤ 0.08	≤ 0.10	≤ 0.10	—
				≤0.75 DC	≤ 5	≤ 0.05	≤ 0.12	≤ 0.12	≤ 0.15	≤ 0.15
					≤ 10	—	≤ 0.10	≤ 0.10	≤ 0.12	≤ 0.12
				DC (Slot)	≤ 5	≤ 0.05	≤ 0.10	≤ 0.12	≤ 0.12	≤ 0.15
	Carbon Steel, Alloy Steel (AISI 1045,AISI 4140)	180—280HB	GM	≤0.25 DC	≤ 5	≤ 0.05	≤ 0.15	≤ 0.15	≤ 0.18	≤ 0.18
					≤ 10	≤ 0.05	≤ 0.12	≤ 0.12	≤ 0.15	≤ 0.15
					≤ 14.5	≤ 0.05	≤ 0.10	≤ 0.10	≤ 0.12	—
				≤0.5 DC	≤ 5	≤ 0.05	≤ 0.12	≤ 0.15	≤ 0.15	≤ 0.18
					≤ 10	—	≤ 0.10	≤ 0.12	≤ 0.12	≤ 0.15
					≤ 14.5	—	≤ 0.08	≤ 0.10	≤ 0.10	—
				≤0.75 DC	≤ 5	≤ 0.05	≤ 0.12	≤ 0.12	≤ 0.15	≤ 0.15
					≤ 10	—	≤ 0.10	≤ 0.10	≤ 0.12	≤ 0.12
				DC (Slot)	≤ 5	≤ 0.05	≤ 0.10	≤ 0.12	≤ 0.12	≤ 0.15

Note 1) The above cutting conditions are determined based on high workpiece and machine rigidity, where no vibration occurred.

If vibrations occur make adjustments according to the machining conditions.

Note 2) Note, vibrations may occur in the following conditions.

- When using long tool overhang.
- When pocket machining corner radii.
- When the workpiece has poor clamping rigidity or when the machine rigidity or workpiece rigidity is low, vibrations can occur easily, if so, reduce cutting conditions such as width and depth of cut and feed per tooth.

Workpiece Material		Breaker	Cutting Width ae (mm)	Depth of Cut ap (mm)	Feed per Tooth (mm/t)					
					Cutting Edge Diameter DC (mm)					
					20	25, 28	32, 35	40	50, 63, 80	100, 125
N	Aluminium Alloy (A6061, A7075 etc)	GL	≤0.25 DC	≤ 5	≤ 0.05	≤ 0.25	≤ 0.25	≤ 0.25	≤ 0.25	≤ 0.25
				≤ 10	≤ 0.05	≤ 0.2	≤ 0.2	≤ 0.2	≤ 0.2	≤ 0.2
				≤ 14.5	≤ 0.05	≤ 0.15	≤ 0.15	≤ 0.15	≤ 0.15	≤ 0.15
			≤0.5 DC	≤ 5	≤ 0.05	≤ 0.25	≤ 0.25	≤ 0.25	≤ 0.25	≤ 0.25
				≤ 10	—	≤ 0.2	≤ 0.2	≤ 0.2	≤ 0.2	≤ 0.2
				≤ 14.5	—	≤ 0.15	≤ 0.15	≤ 0.15	≤ 0.15	≤ 0.15
			≤0.75 DC	≤ 5	≤ 0.05	≤ 0.25	≤ 0.25	≤ 0.25	≤ 0.25	≤ 0.25
				≤ 10	—	≤ 0.2	≤ 0.2	≤ 0.2	≤ 0.2	≤ 0.2
				≤ 14.5	—	≤ 0.15	≤ 0.15	≤ 0.15	≤ 0.15	≤ 0.15
			DC (Slot)	≤ 5	≤ 0.05	≤ 0.25	≤ 0.25	≤ 0.25	≤ 0.25	≤ 0.25
	Aluminium Alloy (A6061, A7075 etc)	GM	≤0.25 DC	≤ 5	≤ 0.05	≤ 0.35	≤ 0.35	≤ 0.4	≤ 0.4	≤ 0.4
				≤ 10	≤ 0.05	≤ 0.3	≤ 0.3	≤ 0.35	≤ 0.35	≤ 0.35
				≤ 14.5	≤ 0.05	≤ 0.25	≤ 0.25	≤ 0.3	≤ 0.3	≤ 0.3
			≤0.5 DC	≤ 5	≤ 0.05	≤ 0.35	≤ 0.35	≤ 0.35	≤ 0.4	≤ 0.4
				≤ 10	—	≤ 0.3	≤ 0.3	≤ 0.3	≤ 0.35	≤ 0.35
				≤ 14.5	—	≤ 0.2	≤ 0.25	≤ 0.25	≤ 0.3	≤ 0.3
			≤0.75 DC	≤ 5	≤ 0.05	≤ 0.3	≤ 0.3	≤ 0.3	≤ 0.35	≤ 0.35
				≤ 10	—	≤ 0.25	≤ 0.25	≤ 0.25	≤ 0.3	≤ 0.3
				≤ 14.5	—	≤ 0.2	≤ 0.2	≤ 0.2	≤ 0.25	≤ 0.25
			DC (Slot)	≤ 5	≤ 0.05	≤ 0.25	≤ 0.25	≤ 0.3	≤ 0.35	≤ 0.35
	Aluminium Alloy (AC4B etc) Aluminium Alloy (ADC12, A390 etc)	GM	≤0.25 DC	≤ 5	≤ 0.05	≤ 0.35	≤ 0.35	≤ 0.4	≤ 0.4	≤ 0.4
				≤ 10	≤ 0.05	≤ 0.3	≤ 0.3	≤ 0.35	≤ 0.35	≤ 0.35
				≤ 14.5	≤ 0.05	≤ 0.25	≤ 0.25	≤ 0.3	≤ 0.3	≤ 0.3
			≤0.5 DC	≤ 5	≤ 0.05	≤ 0.35	≤ 0.35	≤ 0.35	≤ 0.4	≤ 0.4
				≤ 10	—	≤ 0.3	≤ 0.3	≤ 0.3	≤ 0.35	≤ 0.35
				≤ 14.5	—	≤ 0.2	≤ 0.25	≤ 0.25	≤ 0.3	≤ 0.3
			≤0.75 DC	≤ 5	≤ 0.05	≤ 0.3	≤ 0.3	≤ 0.3	≤ 0.35	≤ 0.35
				≤ 10	—	≤ 0.25	≤ 0.25	≤ 0.25	≤ 0.3	≤ 0.3
				≤ 14.5	—	≤ 0.2	≤ 0.2	≤ 0.2	≤ 0.25	≤ 0.25
			DC (Slot)	≤ 5	≤ 0.05	≤ 0.25	≤ 0.25	≤ 0.3	≤ 0.35	≤ 0.35
S	Titanium Alloy (Ti-6Al-4V etc)	GM	≤0.25 DC	≤ 5	≤ 0.05	≤ 0.1	≤ 0.1	≤ 0.1	≤ 0.1	≤ 0.1
				≤ 10	≤ 0.05	≤ 0.1	≤ 0.1	≤ 0.1	≤ 0.1	≤ 0.1
				≤ 14.5	≤ 0.05	≤ 0.1	≤ 0.1	≤ 0.1	≤ 0.1	≤ 0.1
			≤0.5 DC	≤ 5	≤ 0.05	≤ 0.08	≤ 0.1	≤ 0.1	≤ 0.1	≤ 0.1
				≤ 10	—	≤ 0.08	≤ 0.1	≤ 0.1	≤ 0.1	≤ 0.1
				≤ 14.5	—	≤ 0.08	≤ 0.1	≤ 0.1	≤ 0.1	≤ 0.1
			≤0.75 DC	≤ 5	≤ 0.05	≤ 0.05	≤ 0.08	≤ 0.1	≤ 0.1	≤ 0.1
				≤ 10	—	≤ 0.05	≤ 0.08	≤ 0.1	≤ 0.1	≤ 0.1
				≤ 14.5	—	≤ 0.05	≤ 0.08	≤ 0.1	≤ 0.1	≤ 0.1
			DC (Slot)	≤ 5	≤ 0.05	≤ 0.05	≤ 0.05	≤ 0.05	≤ 0.05	≤ 0.05

Note 1) The above cutting conditions are determined based on high workpiece and machine rigidity, where no vibration occurred.


If vibrations occur make adjustments according to the machining conditions.

Note 2) Note, vibrations may occur in the following conditions.


- When using long tool overhang.
- When pocket machining corner radii.
- When the workpiece has poor clamping rigidity or when the machine rigidity or workpiece rigidity is low, vibrations can occur easily, if so, reduce cutting conditions such as width and depth of cut and feed per tooth.

■ RAMPING/HELICAL CUTTING

● RAMPING

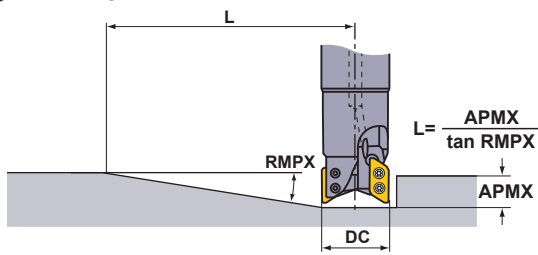

● HELICAL CUTTING

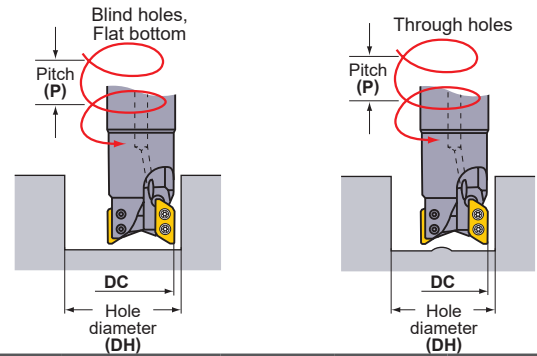

RAMPING/HELICAL CUTTING (Aluminium Alloy)

Holder Type	Cutting Edge Diameter DC (mm)	Insert Corner R RE (mm)	Ramping		Helical Milling (Blind Hole, Flat Bottom)				Helical Milling	
			Maximum Ramping Angle RMPX	Minimum Distance L *1 (mm)	Maximum Hole Diameter DH max. (mm)	Maximum Pitch P max. (mm)	Minimum Hole Diameter DH min. (mm)	Maximum Pitch P max. (mm)	Minimum Hole Diameter DH min. (mm)	Maximum Pitch P max. (mm)
A type	20	0.4—1.2	20.7°	42	37.1 *2	14	36.1	14	22	2
		1.6—2.4	19.9°	43	34.7 *3	13	34.6	13	22	2
		3.0—3.2	18.9°	46	33.1 *4	12	33.3	12	22	1
	25	0.4—1.2	23.1°	37	47.1 *2	14	46	14	31.6	8
		1.6—2.4	22.0°	39	44.7 *3	13	44.4	13	31.6	8
		3.0—3.2	18.7°	46	43.1 *4	12	43	12	31.6	7
	28	0.4—1.2	19.2°	45	53.1 *2	14	52	14	36	8
		1.6—2.4	18.5°	47	50.7 *3	13	50.4	13	36	8
		3.0—3.2	16.7°	52	49.1 *4	12	48.9	12	36	7
	32	0.4—1.2	15.4°	57	61.1 *2	14	59.9	14	45.5	11
		1.6—2.4	14.7°	60	58.7 *3	13	58.3	13	45.5	11
		3.0—3.2	13.8°	64	57.1 *4	12	56.8	12	45.5	10
	35	0.4—1.2	13.4°	66	67.1 *2	14	65.8	14	50	11
		1.6—2.4	12.7°	69	64.7 *3	13	64.3	13	50	10
		3.0—3.2	11.8°	75	63.1 *4	12	62.8	12	50	9
	40	0.4—1.2	11.1°	80	76.7 *2	14	75.9	14	61.5	13
		1.6—2.4	10.4°	85	74.3 *3	13	74.2	13	61.5	12
		3.0—3.2	9.7°	91	72.7 *4	12	72.7	12	61.5	11
	50	0.4—1.2	8.2°	108	96.7 *2	14	95.6	14	81.4	14
		1.6—2.4	7.6°	117	94.3 *3	13	94	13	81.4	13
		3.0—3.2	6.9°	129	92.7 *4	12	92.4	12	81.4	11
	63	0.4—1.2	6.1°	146	122.7 *2	14	121.6	14	107.4	14
		1.6—2.4	5.6°	159	120.3 *3	13	119.9	13	107.4	13
		3.0—3.2	5.2°	171	118.7 *4	12	118.4	12	107.4	12
	80	0.4—1.2	4.6°	193	156.7 *2	14	155.6	14	141.4	14
		1.6—2.4	4.2°	212	154.3 *3	13	153.9	13	141.4	13
		3.0—3.2	3.8°	234	152.7 *4	12	152.4	12	141.4	12
	100	0.4—1.2	3.5°	254	196.7 *2	14	195.5	14	181.5	14
		1.6—2.4	3.2°	278	194.3 *3	13	193.9	13	181.5	13
		3.0—3.2	2.9°	306	192.7 *4	12	192.3	12	181.5	12
	125	0.4—1.2	2.7°	329	246.7 *2	14	245.5	14	231.5	14
		1.6—2.4	2.5°	356	244.3 *3	13	243.8	13	231.5	13
		3.0—3.2	2.3°	386	242.7 *4	12	242.3	12	231.5	12

Note 1) Ramping, helical, and drilling are not recommended for machining of steel and titanium alloys.

Holder Type	Cutting Edge Diameter DC (mm)	Insert Corner R RE (mm)	Ramping		Helical Milling (Blind Hole, Flat Bottom)				Helical Milling	
			Maximum Ramping Angle RMPX	Minimum Distance L *1 (mm)	Maximum Hole Diameter DH max. (mm)	Maximum Pitch P max. (mm)	Minimum Hole Diameter DH min. (mm)	Maximum Pitch P max. (mm)	Minimum Hole Diameter DH min. (mm)	Maximum Pitch P max. (mm)
B type	20	4	17.5°	47	31.5	10	31.8	10	22	1
		5	16.6°	71	29.5	6	31.1	7	22	1
	25	4	15.1°	55	41.5	10	41.4	10	31.7	5
		5	13.7°	61	39.5	9	40.6	9	31.7	5
	28	4	14.1°	59	47.5	10	47.2	10	36	6
		5	13°	65	45.5	9	46.4	9	36	5
	32	4	12.7°	66	55.5	10	55.1	10	45.5	9
		5	12°	70	53.5	9	54.3	9	45.5	8
	35	4	10.8°	78	61.5	10	61	10	50	8
		5	10.2°	83	59.5	9	60.2	9	50	8
	40	4	8.8°	96	71.1	10	70.9	10	61.5	10
		5	8.2°	103	69.1	9	70.1	9	61.5	9
	50	4	6.3°	135	91.1	10	90.6	10	81.3	10
		5	5.8°	146	89.1	9	89.8	9	81.3	9
	63	4	4.6°	184	117.1	10	116.6	10	107.4	10
		5	4.2°	202	115.1	9	115.7	9	107.3	9
	80	4	3.4°	250	151.1	10	150.5	10	141.4	10
		5	3.1°	274	149.1	9	149.6	9	141.4	9
	100	4	2.6°	326	191.1	10	190.5	10	181.4	10
		5	2.4°	354	189.1	9	189.6	9	181.4	9
	125	4	2°	424	241.1	10	240.5	10	231.4	10
		5	1.8°	471	239.1	9	239.6	9	229.9	9

Note 1) The recommended ramping feed is 0.05mm/t or under.

*1 Using the maximum ramping angle, the distance to reach the maximum depth of cut is as follows:

$L = (\text{maximum depth of cut APMX} / \tan \text{RMPX})$. Maximum depth of cut A type is 15.5mm, B type is 14.8mm.

*2 Corner radius of 1.2mm. For other corner radii, use the following formula. $\{(\text{cutting edge diameter DC}) - (\text{corner radius RE}) - 0.25\} \times 2$

*3 Corner radius of 2.4mm. For other corner radii, use the following formula. $\{(\text{cutting edge diameter DC}) - (\text{corner radius RE}) - 0.25\} \times 2$

*4 Corner radius of 3.2mm. For other corner radii, use the following formula. $\{(\text{cutting edge diameter DC}) - (\text{corner radius RE}) - 0.25\} \times 2$

Max.Drilling Depth (Aluminium Alloy)

Type	Insert Corner R RE (mm)	Max.Drilling Depth (mm)					
		Cutting Edge Diameter DC (mm)					
		φ20	φ25	φ28	φ32	φ35	φ40—φ125
A type	0.4	5.3	5.2	5.2	5.2	5.3	5.3
	0.8	5.3	5.2	5.2	5.2	5.3	5.3
	1.2	5.3	5.2	5.2	5.2	5.3	5.3
	1.6	4.8	4.6	4.7	4.7	4.9	4.8
	2.0	4.8	4.6	4.7	4.7	4.9	4.8
	2.4	4.8	4.6	4.7	4.7	4.9	4.8
	3.0	4.3	3.7	4.2	4.2	4.4	4.4
	3.2	4.3	3.7	4.2	4.2	4.4	4.4
B type	4.0	3.7	2.7	3.7	3.6	3.8	3.8
	5.0	3.4	2.3	3.3	3.3	3.5	3.5

AXD4000 can be effectively used for pocket machining without the need for a prepared hole.

